


ENLARGEMENT

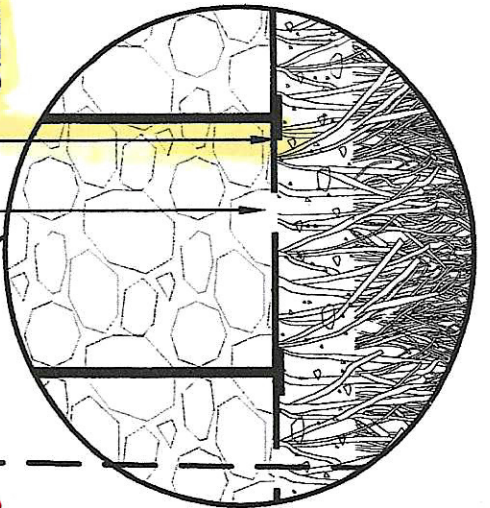

N.
1
3.

** 1st 2.*

SYNTHETIC
GRASS
SPIKES

DRAINAGE PASS
THROUGH FOR
WATER IN
REGULAR GRID
THROUGHOUT
BACKING

Not HST?

** 1st 2.*

MI-3/4/5 SYNTHETIC TURF ATTCH TURF PER
MANUFACTURERS SPECIFICATIONS

ENVIROLOC BACKING SYSTEM

6" COMPACTED AGGREGATE BASE -
CLASS II ROAD BASE, 1/4" MINUS WITH
FINES MIXED IN. (90% COMPACTION)

AGGREGATE SEPARATOR FABRIC
(MIRAFI 140N OR APPROVED EQUAL)

1 X 6 TREX DECKING

PLACED ON ENDS
FOR BUMPER STOP

CONCRETE SCREWS

CONCRETE

Not needed

Why's?

6" ODOT TYPE A AGGREGATE COMPACTED
TO 98% ASTM D698 DENSITY

COMPACTED SUBGRADE

4" SCHEDULE 80 PERFORATED PVC PIPE (LOCATION
AND FLOWLINES PER UTILITY PLAN)

Why?

SYNTHETIC TURF SECTION

1

10

NTS

A